

MOBILE VIDEO

PYRAMID

9" WIDESCREEN TFT LCD ROOF MOUNT MONITOR



MV940RM

WWW.PYRAMIDCARAUDIO.COM

Thank you for the purchase of this wide screen 9 inch TFT-LCD monitor.
Before operating the unit, please read this manual thoroughly and keep it for future reference.

PRECAUTIONS

The set is for use in DC 12V, negative ground vehicles.

Do not operate the set in ways other than described in this guide. Doing so may damage it and may void your warranty.

SAFETY FIRST! FOR REAR SEAT VIEW USE ONLY. Do not install on dashboard or anywhere else that would permit monitor to be viewed by the driver. Monitor must never be used in any manner that will distract driver or interfere with the driver's safe operation of the motor vehicle.

Be careful not to run down the car battery while using the set with the car stopped.

Do not dismantle or modify the set. Doing so may damage it and voids your warranty.


Keep drinks and drops from umbrellas away from the set. Water may damage the internal circuit.

Do not let the set become hot. If temperature in the car is high or the set has been exposed to direct sunlight and is hot, lower the temperature before using it.

In extremely cold temperatures, the movement of the picture may be slow and the picture may be dark, but this is not a malfunction. The set will work normally once the temperature increases.

Small Black and shiny dots inside the liquid crystal panel are normal for liquid crystal product.

Front panel

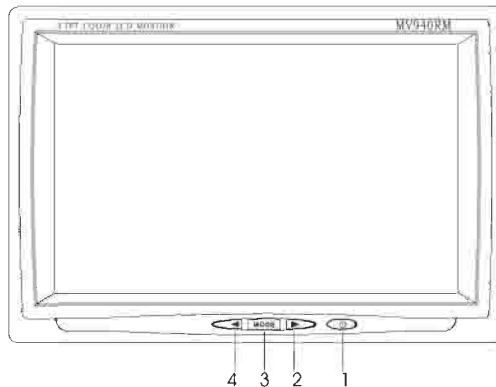


Contents and specifications can be subject to change without prior notice.

SPECIFICATIONS

Screen size: 9inch
System: PAL&NTSC
Display Method: TFT Active matrix system
Display ratio: 16 : 9
Pixel: 800x600
Power supply: DC 12V(+/-10%)
Power consumption: 10W
Weight: 1250g


ACCESSORIES

Remote control Stand Cable
Instruction manual


1.  :Power On/Off
Press it to turn On/Off the monitor.
2. +:Positive adjustment
Press it to adjust the values positively.
3. MENU:Activate OSD Menu.
Press it and it will shows:
VOLUME-BRIGHTNESS-CONTRAST-SATURATION-HUE-
SOURCE INPUT-AV INVERSE-AV MIRROR
4. -:Negative adjustment
Press it to adjust the values negatively.

REMOTE CONTROL

- 1.Power On/Off the monitor
- 2.Brightness negative adjustment
- 3.Brightness positive adjustment
- 4.Saturation negative adjustment
- 5.Saturation positive adjustment
- 6.Contrast negative adjustment
- 7.Contrast positive adjustment
- 8.Volume negative adjustment<No Use>
- 9.Volume positive adjustment<No Use>
- 10.Switch between V1and V2
- 11.Picture Swivel<No Use>



REMOTE CONTROL BATTERY



1. Always use new batteries when replacing the old set.
2. Do not attempt to charge, short-circuit, disassemble, heat or burn used batteries.
3. Battery replacement is necessary when remote control have not respond or stops operating this device.
4. Do not place objects between the remote control and remote receiver.
5. If the Monitor does not operate even when operating the remote control from a close range, it is time to replace the batteries(Product number:(cr2025)).

INSTALLATION

WIRING

Read all wiring precautions. If you are not sure of the connections, contact your authorized dealer.

1. Disconnect the negative (-) lead of the battery before making any power connections.
2. When creating passage holes for the power wires, use grommets to eliminate any sharp edges created during drilling. This will protect the wire from being nicked and causing a short circuit.
3. When connecting the ground lead, fasten the ground lead(black) securely to a clean metal plate on the vehicle

